

# TB 9-2855-7 TO 19-75CFBA-7

DEPARTMENT OF THE ARMY TECHNICAL BULLETIN  
DEPARTMENT OF THE AIR FORCE TECHNICAL ORDER

---

## INSTRUCTIONS FOR THE INSTALLATION OF HARD-TOP CLOSURE KIT FOR 3/4- TON 4 x 4 CARGO TRUCK M37; COM- MAND TRUCK M42; AND TELEPHONE MAINTENANCE TRUCK V41 ( )/GT

---

Departments of the Army and the Air Force, Washington 25, D. C.  
8 December 1952


---

**This bulletin is correct to 24 October 1952**


	Paragraphs	Page
Scope and contents.....	1	1
Use .....	2	4
Preparation for mounting the hard-top closure.....	3	6
Preparation of the hard-top closure.....	4	6
Installation of the hard-top closure.....	5	6
Adjustments .....	6	9
Installation of body front rack and spare wheel.....	7	11

### 1. SCOPE AND CONTENTS. *a. Scope.*

- (1) This bulletin is published for the information and guidance of all personnel concerned in the installation of the hard-top closure for the 3/4-ton 4 x 4 cargo truck M37; command truck M42; and telephone maintenance truck V41 ( )/GT.
- (2) This bulletin augments current technical manuals pertaining to these vehicles. Data appearing in this bulletin, when in conflict with that appearing in publications already published, will govern.

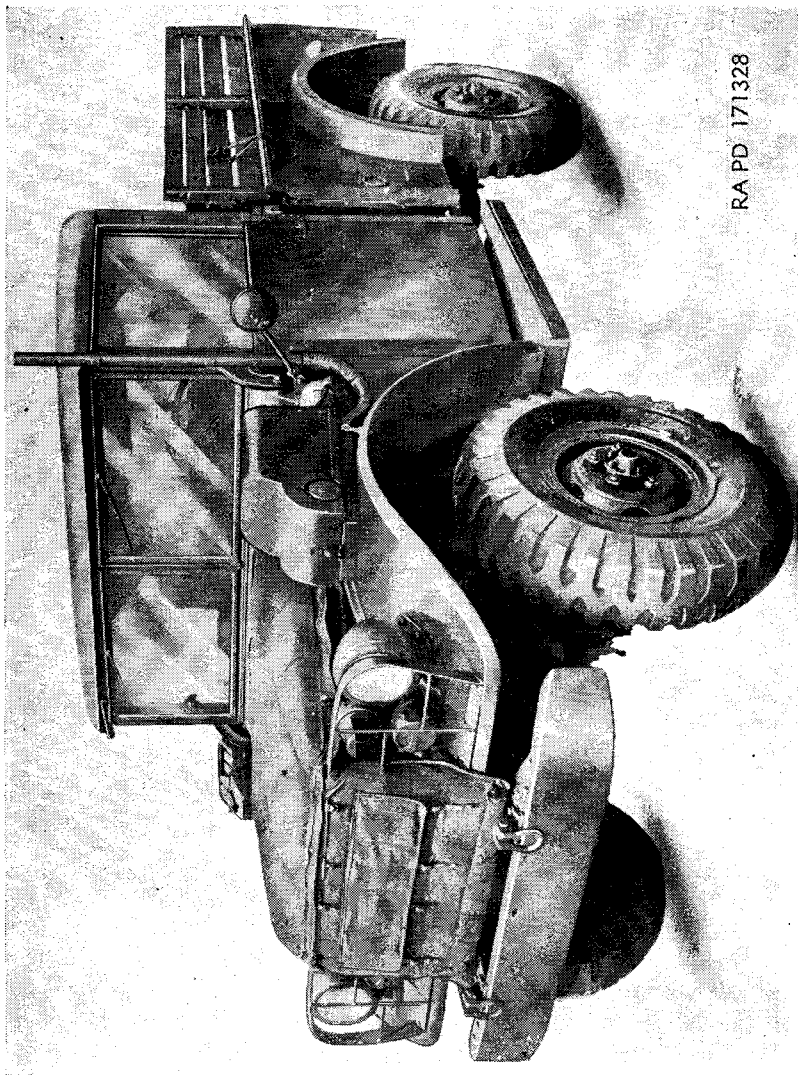


*Figure 1. Left front view of 3/4-ton 4 x 4 cargo truck 3137 with arctic winterization kit installed.*

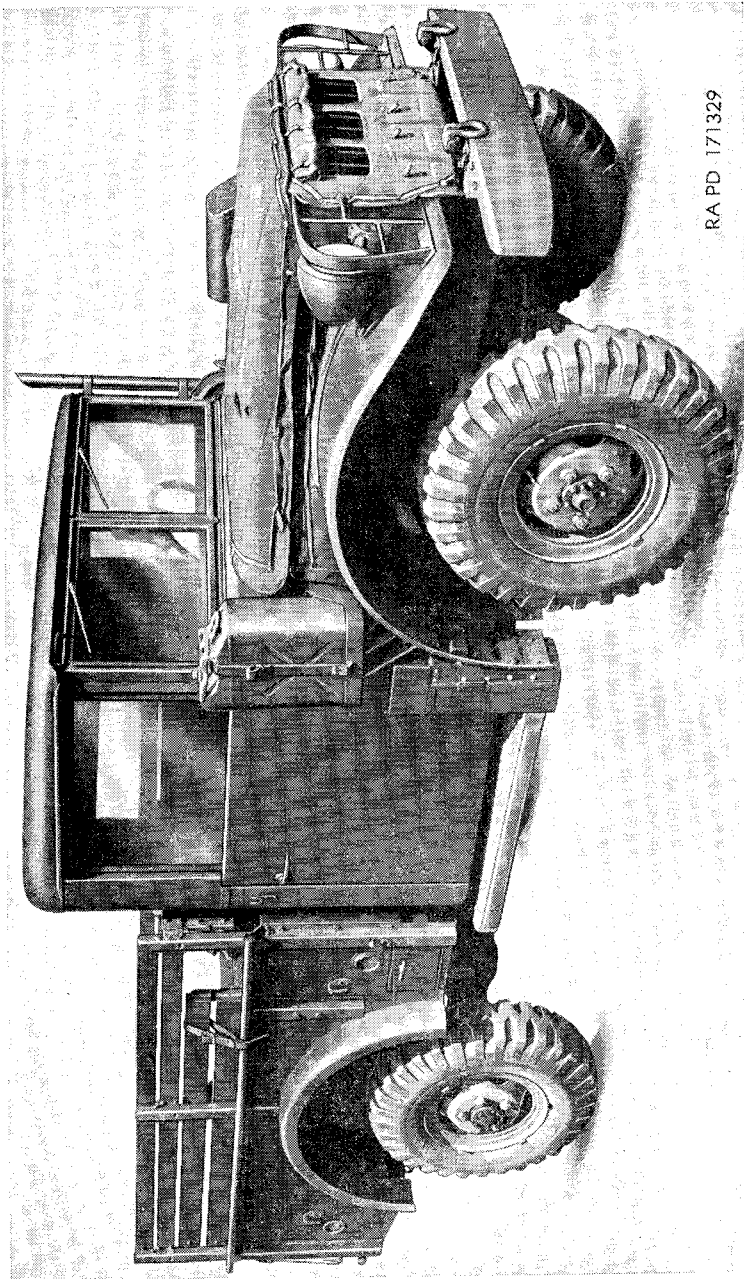

RA PD 171329

*Figure 2. Right front view of 3/4-ton 4 x 4 cargo truck M37 with arctic winterization kit installed.*

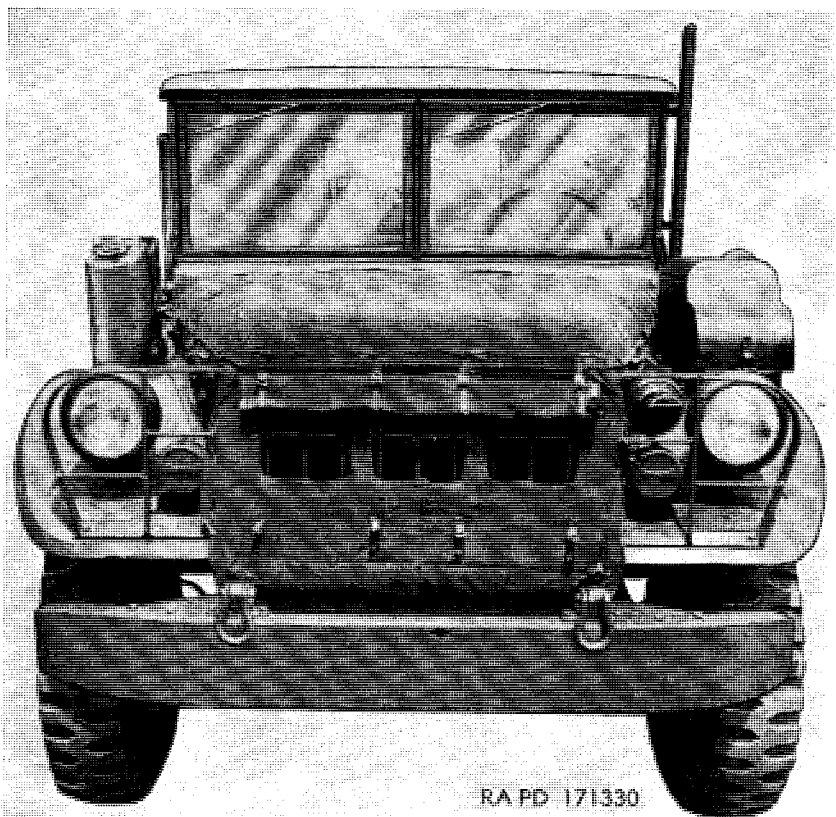

*Figure 3. Front view of 3/4-ton 4 x 4 cargo truck M37 with arctic winterization kit installed.*

*b. Contents.* This bulletin contains detailed instructions for the mounting of the hard-top closure to replace the standard soft-top closure with side curtains and canvas doors and all necessary weather-strip adjustments. For instructions for the installation of personnel heater kit and power plant heater kits, refer to TB 9-2855-5 and TB 9-2855-6, respectively.

**2. USE.** The hard-top closure (fig. 5) is installed, when the power plant heater kit is installed, for use in areas where ambient air temperatures as low as  $-65^{\circ}$  F. are anticipated.